



54
56
Allstate A082

Allstate Leasing

United States

Phone:

Phone:

Fax:

Fax:

Email:

Contact Email:

Prepared for:

Vehicle Summary

Unit		Chassis	
Model:	Model 579	Fr Axle Load (lbs):	12000
Type:	Tractor	Rr Axle Load (lbs)	38000
Description:	St. Paul Park Refining	G.C.W. (lbs):	80000
Application		Road Conditions:	
Intended Serv.:	Tanker, Liquid Bulk	Class A (Highway)	100
Commodity:	Petroleum Products	Class B (Hwy/Mtn)	0
		Class C (Off-Hwy)	0
		Class D (Off-Road)	0
Body		Maximum Grade:	6
Type:		Wheelbase (in):	186
Length (ft):	0	Fr Axle to BOC (in):	68.2
Height (ft):	0.0	Cab to Axle (in):	117.8
Max Laden Weight (lbs):	0	Cab to EOF (in):	173.8
Trailer			
No. of Trailer Axes:	2		
Type:	Tank	Special Req.	
Length (ft):	56	Export to Non-U.S. Territory	
Height (ft):	13.5		
Kingpin Inset (in):	36		
Corner Radius (in):	1		
Restrictions			
Length (ft):	65		
Width (in):	102		
Height (ft):	13.5		

Approved by:

Wane B...

Date: 9-11-2013

Note: All sales are F.O.B. designated plant of manufacture.

PACCAR
FINANCIAL

Ask your dealer for a quote today, or visit our website @ www.paccarfinancial.com.

PACCAR Financial offers innovative finance, lease and insurance programs customized to meet your needs.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:

9/11/2013 11:02:23 AM

Complete

Model Number:

Model 579

Effective Date:

Jun 1, 2013

Quote/DTPO/CO:

Q80108446

Prepared by:

Administrator

Version Number:

27.10



Allstate A082

Allstate Leasing

, United States

Phone:

Fax:

Email:

Phone:

Fax:

Contact Email:

Prepared for:

Data	Code	Description	Weight
Base Model			
0005791	O	Model 579	15,100
0091130	O	Petroleum Products	0
0093020	O	Tanker, Liquid Bulk General freight (linehaul) service using a liquid bulk tanker body or tanker trailer.	0
0098080	O	Tank	0
0098030	O	Export to Non-U.S. Territory	0
Configuration			
0200614	O	SmartWay Designated - Not Selected or Unavailable for this vehicle configuration	0
Frame & Equipment			
0515030	S	10-5/8in Steel Rails To 285 in 10.625 x 3.45 x .313 Dimension, 1,776,000 RBM	0
0611790	S	Aluminum Frame Rail Crossmembers	-60
0644000	S	EOF Tractor Tapered with Xmbr Includes kingpin cutout for steel EOF crossmember only. (If kingpin cutout desired for alum xmbrs, also use Code 0611050 Steel EOF xmbr IPO Alum EOF xmbr.)	0
0651800	O	PBILT Rr Mudflaps, Stainless Steel Premium Hangers (Requires two additional inches on overhang for tractors)	23
0671020	O	Peterbilt Stainless Steel Quarter Fenders	35
0854120	O	JOST JSK36 Fifth Wheel, Light Weight Top Plate	218
0870000	O	Fifth Wheel Setting Behind C/L Bogle 0in Fifth wheel setting 0" behind bogle	0
0890090	O	LH Fifth Wheel Release	0
0890250	O	Multiple Fixed Fifth Wheel Settings The installed setting must be ahead of the REAR OR FIXED SETTING and must be in 2 inch increments from 0 inches to 18 inches. Also, it must be odd or even to match the REAR OR FIXED SETTING.	30
0890560	O	8.6in - 9.25in Fifth Wheel Height	99
0890800	O	Fixed Fifth Wheel, Jost Outboard	51

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 9/11/2013 11:02:23 AM
Effective Date: Jun 1, 2013
Prepared by: Administrator

Complete

Model Number: Model 579
Quote/DTPO/CO: Q80108446
Version Number: 27.10



Data	Code	Description	Weight
0899160	O	Installed Fifth Wheel Setting +16 in (For use with multiple fixed 5th wheel settings - 0890250)	0
0960000	O	Frame Mounted Deck Plate and Access Pkg, LH Side	41

Front Axle & Equipment

1011280	S	Dana Spicer E1202I 12,000 lb 3.5" drop. Factory front axle alignment to improve handling & reduce tire wear. Zerk fittings on tie rod ends, king pins, & draglink ball joints for ease of maintenance & help extend service life of components. Cognis EMGARD® FE75W-90 synthetic axle lube provides over 1% fuel economy improvement. Reduces wear & extends maintenance intervals, resulting in increased uptime. Provides improved fluid flow to protect components in extreme cold conditions & withstand the stress from high temperatures, extending component life.	0
1111190	S	Taper Leaf Springs, Shocks 12,000 lb	0
1243040	O	Power Steering Sheppard HD94	0
1250250	O	Power Steering Reservoir Frame Mounted w/Cooler	2
1353550	S	PHP10 Aluminum PreSet PLUS Hubs - Air Disc Use with Front Axle	0
1380070	O	Greasable Front Spring Pins	0
1380240	O	Dana Spicer Wide Track IPO Std, Front Axle 71in KPI IPO 69in for E1202, E1322, E1462 front axles. For improved turning radius.	5
1380290	S	Air Disc Front Brakes Complies with reduced stopping distance regulations.	0
1380380	S	Tenneco Shocks For Steer Axle	0

Rear Axle & Equipment

1523300	O	Dana Spicer DSP41 40,000 lb Interaxle diff lock air rocker occupies space of one gauge. Laser factory axle alignment to improve handling & reduce tire wear. Magnetic rear axle oil drain plug captures & holds any metal fragments in drive axle lube to extend service life. Parking brakes on all drive axles for optimal performance. Cognis EMGARD® FE 75W-90 synthetic axle lube provides over 1% fuel economy improvement. Reduces wear & extends maintenance intervals, resulting in increased uptime. Provides improved fluid flow to protect components in extreme cold conditions & withstand the stress from high temperatures, extending component life.	35
1616290	S	PHP10 Aluminum PreSet PLUS Hubs	0
1632650	S	Long Stroke Parking Brakes, Drive Axle(s) — Drum	0
1680390	S	Bendix ESP Electronic Stability Program With ATC Tractor service only. The Bendix ESP system is designed to continuously monitor a variety of vehicle parameters and sensors to determine if the vehicle is reaching a critical stability threshold. If such a situation develops, the system will quickly and automatically intervene to assist the driver by selectively applying tractor and trailer brakes, and de-throttling the engine.	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	9/11/2013 11:02:23 AM	Complete	Model Number:	Model 579
Effective Date:	Jun 1, 2013		Quote/DTPO/CO:	Q80108446
Prepared by:	Administrator		Version Number:	27.10



Data	Code	Description	Weight
1680420	O	X30 Brake Drums IPO STD, Drive Axle(s)	-79
1680450	O	Rear Brake Camshaft Reinforcement	9
1680490	O	Gusseted Cam Brackets, Drive Axle(s)	2
1682420	O	ISO 3731 Connector Trailer ABS Power	9
1682710	S	Anti-Lock Braking System (ABS) 6S6M ABS-6. Includes air braking system.	0
1684200	S	Synthetic Axle Lubricant All Axles The conventional model product line includes Fuel Efficient Cognis EMGARD FE75W-90 which provides customers performance advantages over current synthetic lubricants with reduced gear wear and extended maintenance intervals, resulting in increased uptime. In addition, the lubricant provides improved fluid flow to protect gears in extreme cold conditions and withstand the stress from high temperatures, extending component life.	0
1687010	S	Bendix Air Cam Rear Drum Brakes 16.5x7 Inc automatic slack adjusters & outboard mounted brake drums.	0
1703700	O	Ratio 3.70 Rear Axle	0
1821900	O	Peterbilt FLEX Air 38,000 lb, 52in Axle Spacing Aluminum Suspension Crossmembers.	-165
1922260	O	Dash Mtd Dump Switch With Indicator Light For suspension	2

Engine & Equipment

2057746	O	ISX12 425@1800 GOV@2100 1650@1100 ? Torque curve (2013 Emissions) Includes alum flywheel housing, Chevron Delo LE SAE 15W40 engine oil is specially formulated for new low emissions engines. Magnetic engine oil drain plug captures and holds any metal fragments in engine oil to extend service life. N20300 P029 Yes...Idle Shutdown Enable N20380 P001 65....Max Speed In Top Gear N20400 P059 65....Maximum Cruise Speed N20440 P030 5....Idle Shutdown Timer	-10
2140200	O	CARB Engine Idling Compliance PACCAR PX-7, PX-9 and MX; Cummins ISL, ISM and ISX diesel engines will include the required factory installed serialized sticker on the drivers door to identify them as meeting the NOx idling standard.	0
2513760	O	PACCAR 130 Amp Alternator, Brushless w/Voltage Regulator. Remote Sense is not available or needed with the PACCAR Alternator. At low engine RPM, the PACCAR Alternator puts out 80 amps verses 60 amps on other alternators. 12 Volt system with circuit protection for reliable easy maintenance & service. Weather pack silicone sealed electrical chassis connectors enhance value, durability, reliability. Wires numbered every 4" or less.	-18
2521090	O	Immersion Type Pre-Heater 110-120V Phillips	2
2521340	O	Heater For Crankcase Breather ISX12	2

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	9/11/2013 11:02:23 AM	Complete	Model Number:	Model 579
Effective Date:	Jun 1, 2013		Quote/DTPO/CO:	Q80108446
Prepared by:	Administrator		Version Number:	27.10



Data	Code	Description	Weight
2522050	S	PACCAR 12V Starter	0
2538050	O	4 PACCAR Premium 12V Dual Purpose Batt 2800 CCA Threaded stud type terminal. Stranded copper battery cables are double aught (00) or larger to reduce resistance.	62
2539090	O	Big Switch Battery Disconnect Mounted on battery box	4
2539410	O	Battery Jumper Terminal Mounted Under Hood LH Frame Rail. Not available with PX-6 engines.	4
2539720	S	Low Voltage Disconnect System	0
2621030	S	On/Off Fan Clutch	0
2723210	O	18.7 CFM Air Compressor Furnished on engine. Teflon lined stainless steel braided compressor discharge line.	0
2812020	O	C-Brake By Jacobs, ISX12, ISX12-G	77
2925940	O	High Efficiency Fuel/Water Separator, Heated 120V and return fuel. In addition to the fuel filter supplied with the engine.	7
3010400	O	Engine Protection Shutdown Includes oil pressure, oil temperature, coolant temperature, and intake manifold temperature.	0
3114270	S	High Efficiency Cooling System Silicone radiator & heater hoses enhance value, durability, & reliability. Constant tension band clamps reduce leaks. ClimaTech extended life coolant extends maintenance intervals which reduces maintenance costs. Anti-freeze effective to -30 degrees F helps protect the engine. Low coolant level sensor warns of low coolant condition to prevent engine damage.	0
3291680	S	(1) Air Cleaner Firewall Mounted Molded rubber air intake connections with lined stainless steel clamps seal to prevent contaminants in air intake.	0
3365040	S	Exhaust Single RH Side Of Cab DPF/SCR RH under cab. Includes cab entry RH under cab and full round stainless steel exhaust guard.	0
3381780	O	45 Degree Cut Curved Tip Standpipe(s)	0
3387890	O	36in Ht, 5in Dia Chrome, Clear Coat Standpipe(s)	4

Transmission & Equipment

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 9/11/2013 11:02:23 AM
Effective Date: Jun 1, 2013
Prepared by: Administrator

Complete

Model Number:
Quote/DTPO/CO:
Version Number:

Model 579
Q80108446
27.10



Data	Code	Description	Weight
4041220	O	Fuller FO16E310C-LAS 10 Speed UltraShift PLUS Generation III - Linehaul Active Shifting. Includes a two-pedal system fully automatic operation with Hill Start Aid . Computer-controlled shifts are precisely synchronized with engine speeds for maximum efficiency and performance. Features a low mode that can be used in any gear to downshift early for improved engine braking. Includes push button controls and a digital gear indicator, external water-to-oil cooler and internal pump, oil filter, 15.5in Electronic Clutch Actuator. Synthetic lubricant to reduce friction, improve efficiency, & extend component life. Magnetic transmission oil drain plug captures & holds any metal fragments in transmission oil to extend service life. Torque limiting clutch brake.	105
4210950	O	SPL250HD-XL Driveline, Without Midship Bearing	30
4216330	O	SPL170-XL Interaxle Driveline For tandem rear axles	45
4233510	O	Brake Lock PTO Control For use with transmission mounted PTO.	2
4233870	O	Bottom Mount PTO Provisions provides a different hydraulic clutch actuator with its servo air inlet on the RH side in place of the standard LH side, giving clearance for bottom mount PTO's. This code will not work with the following dual transmission mounted PTO's, because of interference issues with the 6-bolt PTO: Chelsea 880 or 885 bottom mounted 8-Bolt PTO's with Chelsea 230, 236, 442 or 660 RH mounted 6-Bolt PTO's on Eaton FR transmissions OR Chelsea 880 or 885 bottom mounted 8-Bolt PTO's with Chelsea 230, 236 or 340 RH mounted 6-Bolt PTO's on Eaton RT transmissions.	4
4233900	O	(1) Dash Mtd Single Acting EOA PTO Controls Electric over air	0
4256130	O	Dash Mounted Cobra Shifter N/A with manual transmissions	8

Air & Trailer Equipment

4510750	S	Bendix AD-1S Air Dryer with Heater An integrated system air dryer that incorporates the functions of the air dryer, purge reservoir (which increases the drying capacity), wet air tank, pressure relief valve, single check valves, and pressure protection valve for air susp and other air accessories. Includes easy-to-service spin-on desiccant cartridge.	0
4520420	O	Berg Pull Cord Drain Valve(s) - All Air Tanks	0
4540420	S	Nylon Chassis Hose	0
4543340	O	Aluminum Painted Air Tanks All air tanks are aluminum with painted finish except when Code 4543330 Polish Aluminum Air Tanks is also selected (then exposed air tanks outside the frame rails will be polished aluminum). Peterbilt will determine the optimal size and location of required air tanks. Narratives requesting a specific air tank size or location will not be accepted for factory installation. See ECAT to determine number or location of air tanks installed.	-45

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	9/11/2013 11:02:23 AM	Complete	Model Number:	Model 579
Effective Date:	Jun 1, 2013		Quote/DTPO/CO:	Q80108446
Prepared by:	Administrator		Version Number:	27.10



Data	Code	Description	Weight
4543440	O	Clear Outside Frame of All Air System Components RH BOC	0
4611590	O	Gladhand, Plug & ISO Holder Mounted BOC/BOS	0
4611660	O	Slide Bar Hose Tender with Double Spring	4
4612800	O	Trailer Hand Valve	0
4614810	S	A&E Connections BOC/BOS with Hose Tenna	0
4614850	O	12ft A&E Lines Straight & Two 7-way Plugs	8
4620080	O	7th Wire of 7-Wire Cable Hot at All Times w/ABS	0

Tires & Wheels

5069380	S	FF: BR 14Ply 295/75R22.5 R283 Ecopia	0
5158900	O	RR: MN 20ply 445/50R22.5 X1-XDN2	-208
5190004	O	Code-rear Tire Qty 04	0
5221740	O	FF: Alcoa 883677 LVL1 22.5x8.25 Alm Whl	-59
5320150	O	RR:Alcoa 840607 LVL1 22.5X14.00 Alm Whl 0 in. outset, outboard valve stem. Pilot Mount. 12,800 lb. load rating per wheel. Includes the Alcoa proprietary LVL ONE Clean Buff Finish.	-328
5390004	O	Code-rear Rim Qty 04	0
5407640	O	FF: Polish Wheels, Single Or Tandem Steer Polish outer surface of outer wheel. W/o chrome wheel nuts.	0
5407660	O	RR: Polished Wheels, Tandem Drive Polish outer surface of outer wheel. W/o chrome wheel nuts.	0
5410140	O	FF: Dura-Bright XBR Technology Finish outer surface of outer wheel. Includes wheel guards. Requires polished option.	0
5410160	O	RR: Dura-Bright XBR TechnologyFinish-Tandem Axle outer surface of outer wheel. Includes wheel guards. Requires polished option.	0

Fuel Tanks

5554160	O	26in Aluminum 90 Gallon Fuel Tank LH U/C Includes steps for cab access. Paddle handle filler cap with threadless filler neck. Top draw fuel plumbing reduces chance of introducing air into the fuel system during low fuel level conditions due to the central placement of fuel pickup tube. Wire braid fuel lines increase durability & reduce potential for leaks.	20
5602090	O	Location LH U/C 90 Gallon	0
5650310	O	Fuel Tank Fill Center Not available on under cab fuel tanks.	0
5650490	O	Fuel Cooler Required with single fuel tank.	15
5651060	O	Arctic Wrap On All Fuel Lines Dual draw uses no wrap from draw/return tees to engine. Single draw has no wrap from LH motor mount to engine but wrap is used from tank to LH motor mount. Arctic wrap will be omitted from lines in the engine compartment.	2

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	9/11/2013 11:02:23 AM	Complete	Model Number:	Model 579
Effective Date:	Jun 1, 2013		Quote/DTPO/CO:	Q80108446
Prepared by:	Administrator		Version Number:	27.10



Data	Code	Description	Weight
5652850	O	Perforated Metal Anti-Siphon Device(s) (Requires Engineering review with Arctic Fox or Split Fuel Tanks)	0
5652890	O	DEF Tank Mounted LH BOC Models 210, 220 and 320 mounted LH cab fender.	0
5655019	S	DEF Tank Small	0
5760010	O	RH Tank None Furnished	-86
Battery Box & Bumper			
6010670	O	Aluminum Space Saver Battery Box LH BOC Battery Access From Side	-57
6030150	O	Rubber Battery Pad In Bottom Of (1) Battery Box (Mat in box that holds batteries only)	4
6040550	S	DPF Cab Entry Aluminum Non-Slip Step RH Under Cab On Model 579 when specified with chassis fairings, the box will be aerodynamic.	0
6111150	O	Aero Bumper, Molded 3-Piece, Painted Body Color	0
Cab & Equipment			
6515670	S	Aerodynamic 117 BBC Alum Cab & SMC Hood w/ SBFA Hood has stainless steel grill with chrome plated grille surround and Peterbilt bird. Includes anti-blow down hood device.	0
6540440	O	Key All Units Alike Please add your 4 digit key code number in the key code field.	0
6540660	O	SmartSound Cab Insulation Package Cab acoustic insulation package for day cabs. Includes insulated inside firewall, top side floor damping, absorber treated kick panels, and insulated backwall and roof structure.	65
6542554	O	KEY P0205	0
6911100	S	Peterbilt Evolution ST Driver Peterbilt Evolution ST air seat, high height backrest, adjustable seat track length, 1 chamber lumbar support, suspension with fixed damping, fore-aft isolator with lockout, Vinyl bellows over suspension. Standard vinyl finish - color coordinate with interior color.	0
6921740	O	PB Evolution ST Non-Adj Pass Seat Standard vinyl, no suspension cover, no seat back recline	-10
6930580	O	Drivers Armrests - LH & RH Required in Model 587 with Evolution LX seats, optional with Evolution ST Seats.	4
6930590	O	Passenger Armrest - LH only Required with Evolution LX seats, optional with Evolution ST Seats.	2
6931120	O	Seat Belt Color Orange IPO Standard Black	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	9/11/2013 11:02:23 AM	Complete	Model Number:	Model 579
Effective Date:	Jun 1, 2013		Quote/DTPO/CO:	Q80108446
Prepared by:	Administrator		Version Number:	27.10



Data	Code	Description	Weight
6939140	O	Tube frame under Passenger Seat Evolution Pass Non-adjustable seat Only available with code 6921740	-20
6939190	O	Mordura Driver Available with LX & ST seats. Armrest ordered with this seat will be covered with Mordura. With Titanium Interior, your seat color will be Gray. With Buckskin Interior, your seat color will be Chocolate Brown.	0
6939230	O	Mordura Passenger Available with LX & ST seats. Armrest ordered with this seat will be covered with Mordura. With Titanium Interior, your seat color will be Gray. With Buckskin Interior, your seat color will be Chocolate Brown.	0
6939400	S	Air Ride Driver	0
6939420	S	High Back Driver	0
6939510	O	Non-Air Ride Passenger	0
6939520	S	High Back Passenger	0
7001520	O	Adjustable Steering Column - Tilt/Telescope	10
7001580	O	Vanity Mirror on Inside Sunvisors For use with ProBilt or Prestige Interior	0
7001630	O	Premium Steering Wheel w Multi Function Premium Multi-functional Leather Wrapped Steering Wheel with Peterbilt logo over horn button. Includes audio volume, seek, mute and mode button on LH pod with cruise control on/off/cancel, set/resume and accelerate/coast on the right pod	5
7037070	S	Prestige Interior - Titanium Includes Innovative gun metal A,B & C instrument panels and color-matched D instrument panel, monochromatic color-coordinated dash with glare-resistant, soft-touch upper, black bezel on gauges, power ports, burlwood insert on contoured doorpads, LH and RH door mounted map pockets with built-in courtesy lights, 18 inch 4-spoke soft-touch steering wheel, soft-touch steering column cover, power lift passenger window, padded fabric headliner and vinyl wall panels, extruded rubber floor covering, (3) inside sunvisors, (2) coat hooks, header-mounted dome light, driver and passenger dome/reading lights, footwell lighting, integrated "dead pedal", (4) inside entry grab handles, cup holder and map bin in dash.	0
7210510	S	3-Piece Glass Rear Cab Window All pieces fixed	0
7210540	S	Day Cab Rear Window	0
7230060	S	One Piece Curved Windshield	0
7230360	S	Power Door Locks AND Power Window Lifts Standard	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	9/11/2013 11:02:23 AM	Complete	Model Number:	Model 579
Effective Date:	Jun 1, 2013		Quote/DTPO/CO:	Q80108446
Prepared by:	Administrator		Version Number:	27.10



Data	Code	Description	Weight
7322010	S	Combo Fresh Air Heater/Air Conditioner With radiator mounted condenser, dedicated side window defrosters, Bl-Level Heater/Defroster Controls, 54,500 BTU/HR, and silicone heater hoses.	0
7322130	O	Cup Holder (Floor Mounted) Includes two standard-size drink holders and one extra-large jugholder, coin tray, and clipboard-size storage area.	4
7514010	O	Peterbilt Aero Rear View Mirror, Motorized Includes top mirror with motorized, adjustable dual axis heated glass. Bottom mirror is an integrated convex surface. Includes black textured arms with breakaway feature.	3
7514020	S	Aero Rear View Mirror Housing - Body Color	0
7514050	S	Look Down Mirror Over Passenger Door with Black Housing	0
7561190	O	Convex Aero Mirrors LH/RH Hood Mounted Bright finish with one-piece straight arms for rearward visibility.	0
7610500	S	Under Cab Air Horn	0
7725740	O	Midlevel Speaker Package For Cab (4) Speakers	6
7740130	O	Cobra 29 CB Radio Mounted Center of Header With Weatherband. Mounted in Center of Header, Sound Tracker & Illuminated Panel. Includes Wiring, Microphone Clip & Speaker. Must Select Antenna(s) Option.	10
7748150	O	(1) Antenna For Factory Installed Or F/O CB Mounted LH side of body, with antenna cables. Provides clear top of cab.	1
7749500	O	Sirius Satellite Radio Service Provider Option designates Sirius Satellite Radio - subscription required (888-539-7474).	0
7789620	O	SmartNav Telematics and infotainment system, including integrated Audio, provides an expandable list of features and capabilities. Please see the Product Portfolio for details.	4
7851040	O	Removable Bugscreen Behind Grille	2
7851480	S	Peterbilt Electric Windshield Wipers with Intermittent Feature	0
7852020	O	Cab Air Suspension	15
7852050	O	Auto Reset Circuit Protection Daycab and sleeper	0
7852090	O	Cigar Lighter and Ash Cup Mounted in dash.	2
7900090	O	Triangle Reflector Kit Shipped Loose	13
7900310	O	5 lb Dry Chemical ABC Fire Extinguisher Mounted outboard of driver seat	8

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 9/11/2013 11:02:23 AM
Effective Date: Jun 1, 2013
Prepared by: Administrator

Complete

Model Number: Model 579
Quote/DTPO/CO: Q80108446
Version Number: 27.10



Data	Code	Description	Weight
7901130	O	Backup Alarm (107dB)	3
8011140	O	Engine Oil Temperature Located in SmartNav display	0
8011150	O	Main Transmission Oil Temperature Located in SmartNav display	0
8011160	O	Drive Axle #1 Front Oil Temperature Located in SmartNav display	0
8011170	O	Drive Axle #2 Rear Oil Temperature Located in SmartNav display	0
8021550	O	Air Suspension Pressure 1, Load Located in SmartNav display	0
8021560	O	Air Filter Restriction Pressure Located in SmartNav display	0
8070010	O	Up To (4) Additional Electric Switches Without wiring	1
8070080	O	(2) Additional Dash Switches With Wiring Located on dash panel C. Availability subject to dash space. Includes 4 in. 14 gauge wire with butt splice at rear of each additional switch.	0
8070120	O	Manifold Pressure, Boost Located in SmartNav display	0
8070130	O	Tractor Brake Application Located in SmartNav display	0
8070140	O	Ammeter Located in SmartNav display	0
8070170	O	DPF Status Located in SmartNav display	0
8070180	O	Fuel Economy Located in SmartNav display	0
8070190	O	Percent Torque Located in SmartNav display	0
8071890	S	Main Instrument Panel Includes Driver Information Display and Instrument Package With Speedometer, Tachometer, Fuel Level Gauge, Engine Oil Pressure, Engine Coolant Temperature, (2) Air Pressure, DEF Level Gauge.	0
8111110	S	Headlights Composite Fender Mounted Integral park, turn, and side marker	0
8120990	S	(5) Marker Lights, Aero Located in outside sunvisor unless visor omitted, then mounted on roof.	0
8131160	O	Over-Ride Switch For Daytime Running Lights	0
8131560	O	(2) Peterbilt Fog Lights Recessed in bumper	6
8133470	O	Switch And Wiring For F/O Beacon/Strobe 10ft coiled wire BOC/BOS at rear sill.	2

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	9/11/2013 11:02:23 AM	Complete	Model Number:	Model 579
Effective Date:	Jun 1, 2013		Quote/DTPO/CO:	Q80108446
Prepared by:	Administrator		Version Number:	27.10



Data	Code	Description	Weight
8133960	S	Daytime Running Lights (Required on Canadian units)	0
8140350	O	Trucklite 44030R2 LED Stop/Turn/Tail 40204 Backup, bracket mounted LH/RH EOF	2
8140650	S	Peterbilt Signature Door Light Turn Signal	0
8151170	O	(2) Load Lights, Flush Mounted Low Inboard BOC/BOS	4
Paint			0
8530770	S	(1) Color Dupont Two Stage - Cab/Hood Base Coat/Clear Coat N85020 A - L0306EB BLUE N85400 HOOD TOP L0306EB BLUE N85500 CAB ROOF L0306EB BLUE N85200 FRAME N0001EA BLACK N85700 BUMPER L0306EB BLUE N85300 FENDER L0306EB BLUE	
Options Not Subject To Discount			0
9408904	O	Heavy Duty Emissions Surcharge \$9250	
Miscellaneous			0
9409001	O	Day Cab / Prestige Interior (DM)	
Total Weight			15097

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval. Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.			
Printed:	9/11/2013 11:02:23 AM	Complete	Model Number: Model 579
Effective Date:	Jun 1, 2013		Quote/DTPO/CO: Q80108446
Prepared by:	Administrator		Version Number: 27.10



Allstate A082

Allstate Leasing

, United States

Phone:

Fax:

Email:

Phone:

Fax:


Contact Email:

Prepared for:

Horizontal Dimensions

Model: Model 579

Quote/DTPO/CO Number: Q80108446

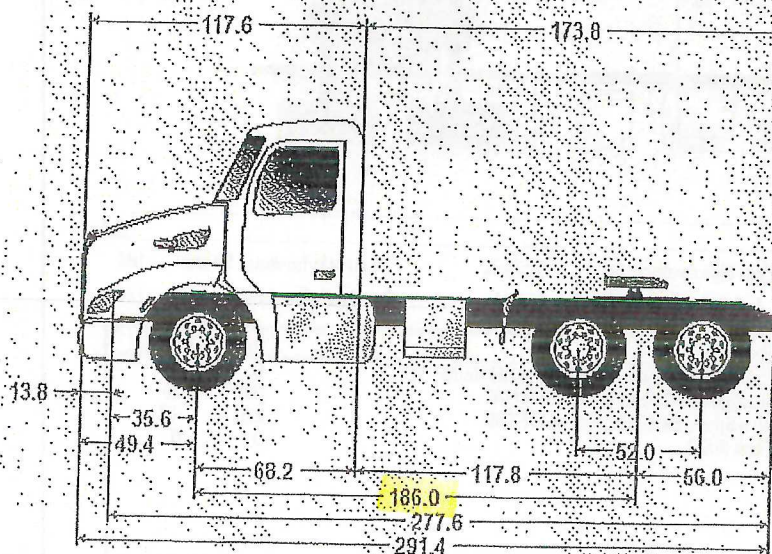

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:

9/11/2013 11:01:55 AM

Complete

Model Number:

Model 579

Effective Date:

Jun 1, 2013

Quote/DTPO/CO:

Q80108446

Prepared by:

Administrator

Version Number:

27.10



Allstate A082

Allstate Leasing

, United States

Phone:

Fax:

Email:

Phone:

Fax:

Contact Email:

Prepared for:

Fuel Tanks

☒ Summary☒ Right ☐ Left


Location

Under Cab
Back Of Cab 1
Back Of Cab 2
Between Rails
Def Tank

Type

Material

Diameter

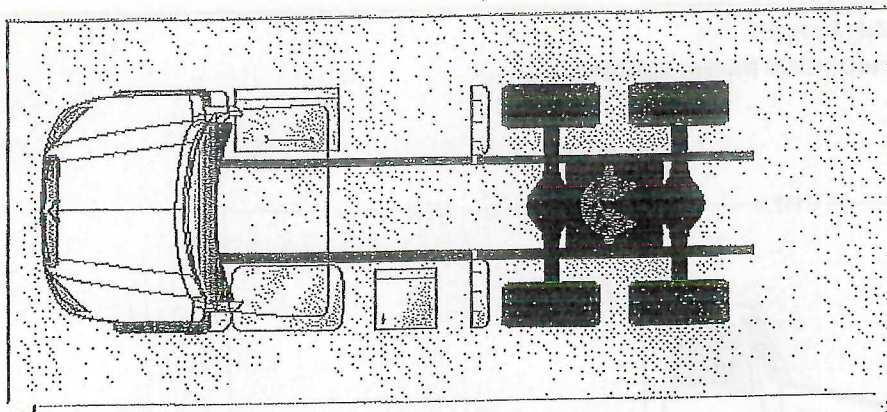

☒ Top View Right Side Available Space: 52.76 in. Current Wheelbase Space: 186
☐ Side View Left Side Available Space: 15.08 in. Required Wheelbase Space: 171

Position	Description	Price	Weight
RH Under	DPF Cab Entry Aluminum Non-Slip Step RH Under Cab	0	0
LH Under	26in Aluminum 90 Gallon Fuel Tank LH U/C	347	20
LH BOC1	Aluminum Space Saver Battery Box LH BOC	270	-57
Def Tank LH	DEF Tank Small	0	0

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:

9/11/2013 11:01:28 AM

Complete

Model Number:

Model 579

Effective Date:

Jun 1, 2013

Quote/DTPO/CO:

Q73608558

Prepared by:

Administrator

Version Number:

27.10



Allstate A082

Allstate Leasing

, United States

Phone:

Fax:

Email:

Phone:

Fax:


Contact Email:

Prepared for:

Fifth Wheel Height

Model: Model 579

Quote/DTPO/CO Number: Q80108446

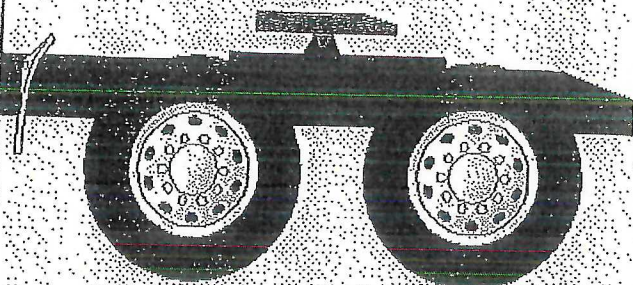

Component	Laden	Unladen
Fifth Wheel	9.0	9.0
Frame Rail	10.6	10.6
Suspension	8.5	8.8
Rear Tie	18.7	19.9
Total Height	46.8	48.3

Component	Code	Description
Fifth Wheel	0854120	105T-35K36 Fifth Wheel, Light Weight Top Plate
Frame	0515030	10.5/8in Steel Rails To 285 in
Suspension	1821900	Peterbilt FLEX-Air 38,000 lb 62in Axle Spacing
Tire	5158900	RR: MN 205R445/50R22.5X1XON2

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:

9/11/2013 11:02:08 AM

Complete

Model Number:

Model 579

Effective Date:

Jun 1, 2013

Quote/DTPO/CO:

Q80108446

Prepared by:

Administrator

Version Number:

27.10



Atlanta, Georgia

Atlanta, Georgia

Phone:
Fax:
E-mail:
Proposed for:

Phone:
Fax:
E-mail:

Fifth Wheel Height

Model	Year	Height
1995	1995	100
1996	1996	100
1997	1997	100
1998	1998	100
1999	1999	100
2000	2000	100
2001	2001	100
2002	2002	100
2003	2003	100
2004	2004	100
2005	2005	100
2006	2006	100
2007	2007	100
2008	2008	100
2009	2009	100
2010	2010	100
2011	2011	100
2012	2012	100
2013	2013	100
2014	2014	100
2015	2015	100
2016	2016	100
2017	2017	100
2018	2018	100
2019	2019	100
2020	2020	100
2021	2021	100
2022	2022	100
2023	2023	100
2024	2024	100
2025	2025	100
2026	2026	100
2027	2027	100
2028	2028	100
2029	2029	100
2030	2030	100
2031	2031	100
2032	2032	100
2033	2033	100
2034	2034	100
2035	2035	100
2036	2036	100
2037	2037	100
2038	2038	100
2039	2039	100
2040	2040	100
2041	2041	100
2042	2042	100
2043	2043	100
2044	2044	100
2045	2045	100
2046	2046	100
2047	2047	100
2048	2048	100
2049	2049	100
2050	2050	100
2051	2051	100
2052	2052	100
2053	2053	100
2054	2054	100
2055	2055	100
2056	2056	100
2057	2057	100
2058	2058	100
2059	2059	100
2060	2060	100
2061	2061	100
2062	2062	100
2063	2063	100
2064	2064	100
2065	2065	100
2066	2066	100
2067	2067	100
2068	2068	100
2069	2069	100
2070	2070	100
2071	2071	100
2072	2072	100
2073	2073	100
2074	2074	100
2075	2075	100
2076	2076	100
2077	2077	100
2078	2078	100
2079	2079	100
2080	2080	100
2081	2081	100
2082	2082	100
2083	2083	100
2084	2084	100
2085	2085	100
2086	2086	100
2087	2087	100
2088	2088	100
2089	2089	100
2090	2090	100
2091	2091	100
2092	2092	100
2093	2093	100
2094	2094	100
2095	2095	100
2096	2096	100
2097	2097	100
2098	2098	100
2099	2099	100
2100	2100	100